

PIPES SPECIALS & FITTINGS



B) TEES

TABLE 4

Nominal Diameter mm	Barrel		Branch		
	Outside Diameter A mm	C mm	Outside Diameter B mm	0.5 times OD of barrel 'A' plus	
				D mm	F mm
100	114.3	270	114.3	200	130
150	168.3	290	168.3	200	140
200	219.1	370	219.1	250	150
250	273	410	273	250	160
300	323.9	450	323.9	250	180
350	355.6	530	355.6	300	200
400	406.4	600	406.4	300	230
450 to 700	457 to 711	1.5 times OD of branch 'B' but with a min. of 0.5 times OD of barrel 'A'	457 to 711	300	300
750 to 900	762 to 914		762 to 914	380	300
1000 to 2200	1016 to 2235		1016 to 2220	380	380

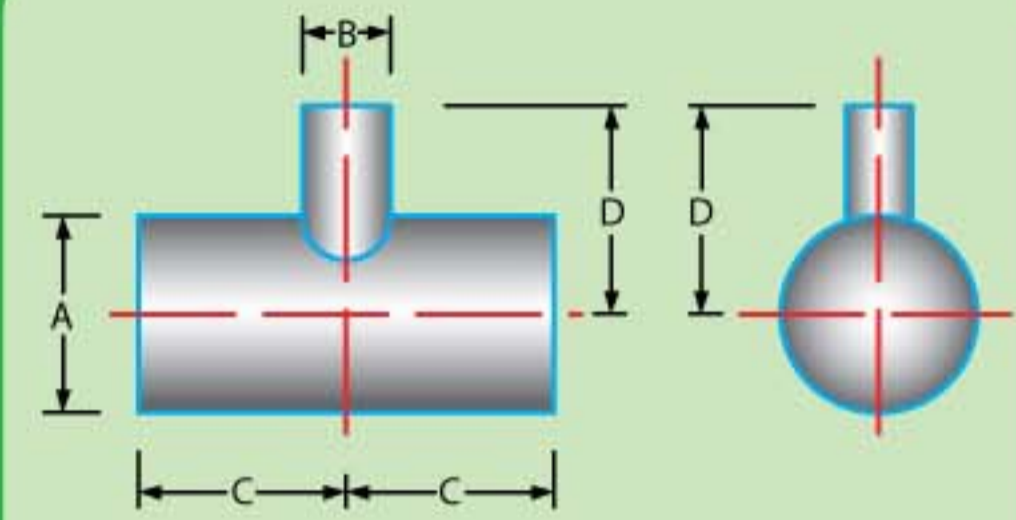


Figure 4 : Plain End Tee for Slip-on Type Coupling and Butt Welded Joint

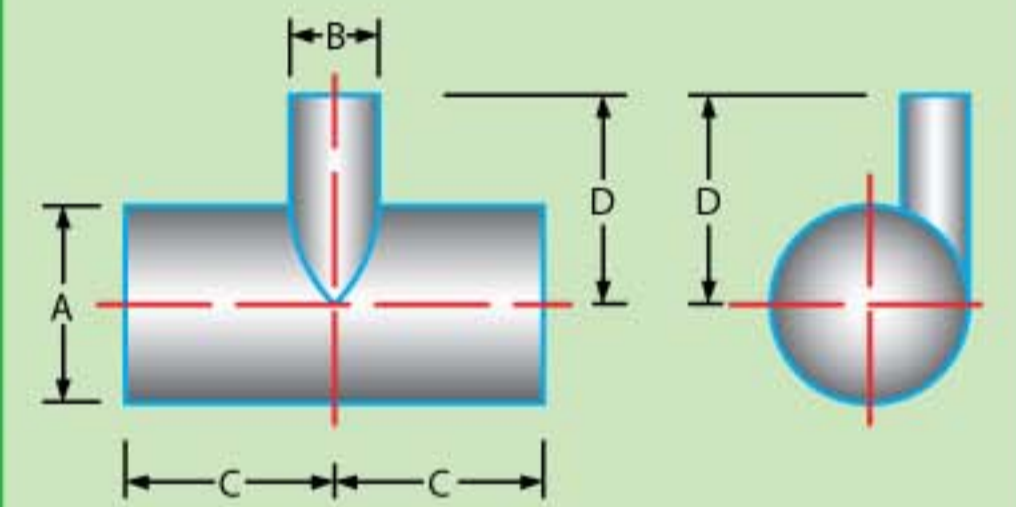


Figure 5 : Plain End Level-Inverted Tee

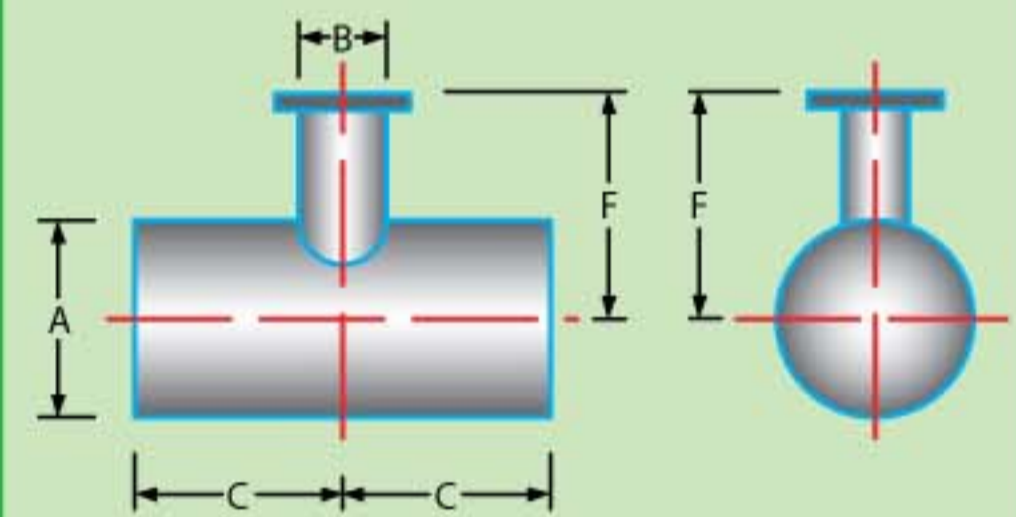


Figure 6 : Tee with Flanged Branch

C) TAPER

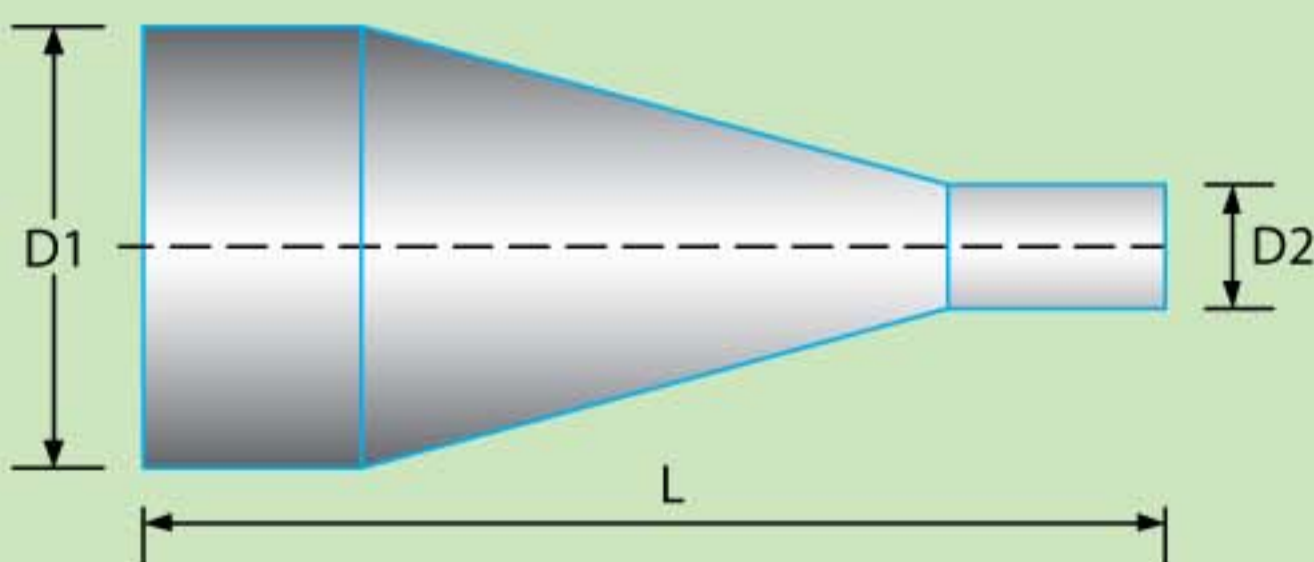


Figure 7 : Concentric Taper

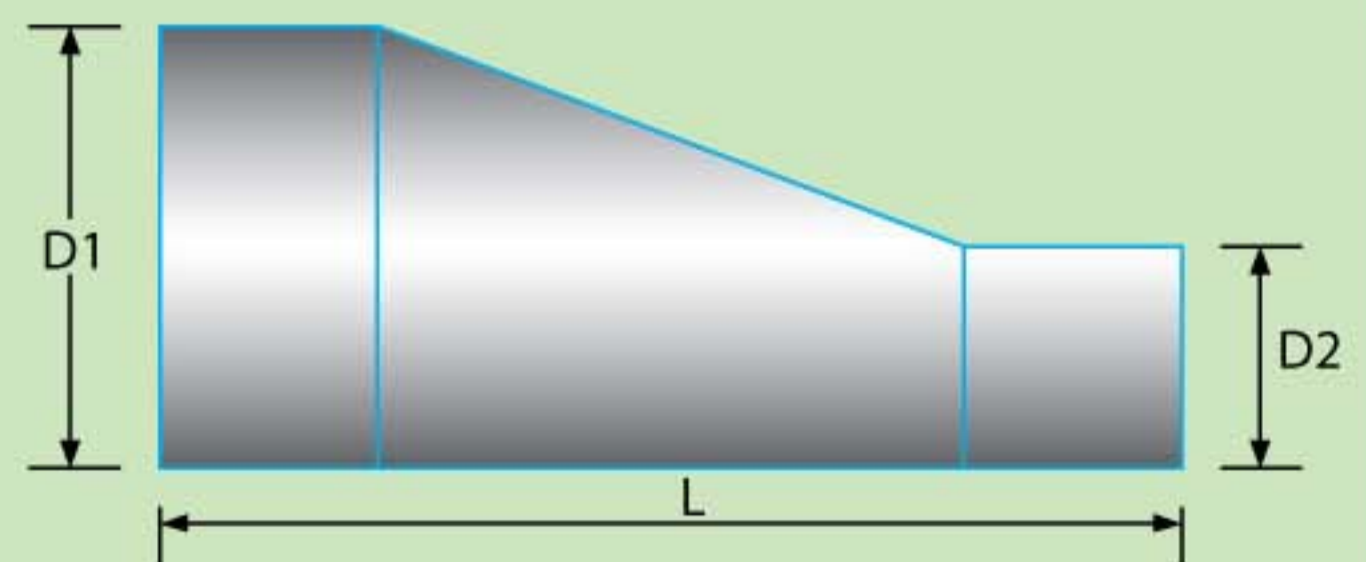


Figure 8 : Eccentric or Flat Taper